

Model: BASIC DARK NATURE 100X300 (3+)(A)


Codes: 100124110 - C226500531

Absorption: Bla - Porcelain tiles ($E \leq 0.1\%$)

Thickness: 1/8 " approx.

Family: BASIC

Tone variations: V2

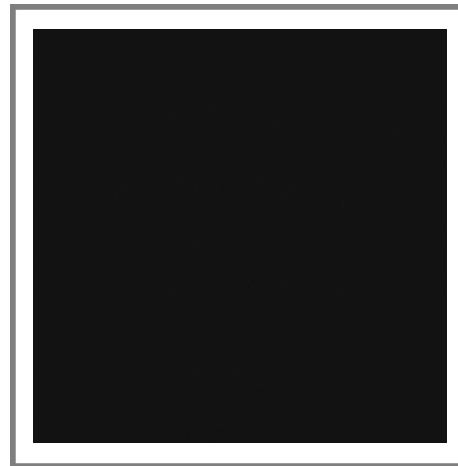

DIMENSIONAL FEATURES

| | | |
|-----------------------------|--------------------|---------------|
| Length | 118 3/32 " approx. | |
| Thickness | 1/8 " approx. | |
| Width | 39 11/32 " approx. | |
| Length and width deviation | Below 0.15% | $\leq 0.5\%*$ |
| Side straightness deviation | Below 0.15% | $\leq 0.5\%*$ |
| Squareness deviation | Below 0.15% | $\leq 0.6\%*$ |
| Surface flatness deviation | Below 0.15% | $\leq 0.5\%*$ |

MECHANICAL FEATURES

| | | |
|---------------------|------------------|--|
| Modulus of rupture | > 9 LBF | |
| Abrasion resistance | <140 | |
| Crazing resistance | Resists 3 cycles | |

HYGIENIC FEATURES

| | | |
|---|---------|--|
| Chemical resistance | CLASE A | |
| Stain resistance | 5 | |
| Resistance to cold food products | APTO | |
| Resistance to hot food products | APTO | |
| Dimensional stability at elevated temperature | CUMPLE | |

ANTI-SLIP VALUE

| | | |
|--|------|--|
| Resistance to bathroom cleaning products | APTO | |
| Stain resistance | 5 | |
| Resistance to cigarette burns | APTO | |

Certified company



SCOPE OF USE

| | |
|------------------|----------------------------|
| Technical code-1 | Use on walls |
| Technical code-2 | No additional requirements |

PACKING

| | |
|---------|-----------|
| Boxes | 1 ST/CS |
| Pallets | 20 ST/PAL |

Certified company



A DCOF value of > 0.42 is the new standard for tiles specified for commercial level interior applications expected to be walked upon when wet, in standard A137.1-2012. It replaces the SCOF value of > 0.60 referenced in ADA Guidelines (measurement made as per the ASTM C1028 test method) However, there are many factors that affect the possibility of a slip occurring and then tiles with a DCOF of 0.42 or greater are not necessarily suitable for all projects. The specifier shall determine if tiles are appropriate for specific project conditions, considering by way of example, but not limited to; type of use, traffic, expected contaminants, expected maintenance, expected wear and manufacturer guidelines and recommendations. Tiles with a DCOF inferior to 0.42 shall only be installed when the surface will kept dry when walked upon and proper safety procedures are followed when cleaning the tiles.

A DCOF value of > 0.42 is the new standard for tiles specified for commercial level interior applications expected to be walked upon when wet, in standard A137.1-2012. It replaces the SCOF value of > 0.60 referenced in ADA Guidelines (measurement made as per the ASTM C1028 test method) However, there are many factors that affect the possibility of a slip occurring and then tiles with a DCOF of 0.42 or greater are not necessarily suitable for all projects. The specifier shall determine if tiles are appropriate for specific project conditions, considering by way of example, but not limited to; type of use, traffic, expected contaminants, expected maintenance, expected wear and manufacturer guidelines and recommendations. Tiles with a DCOF inferior to 0.42 shall only be installed when the surface will kept dry when walked upon and proper safety procedures are followed when cleaning the tiles.

26/2/2020