


Model: ICE NEBRASKA TEA 45X120(A)
Codes: 100202069 - V30800191
Water absorption: BIII - Wall tiles ($10\% \leq E \leq 20\%$)
Thickness: 15/32 " approx.



MATE / MATT

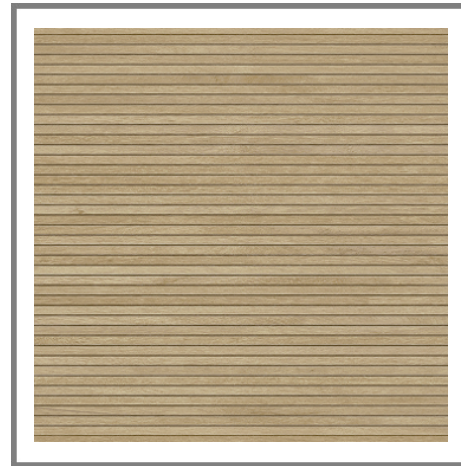

DESTONIFICADO
TONE VARIATIONS



DIMENSIONAL FEATURES

Thickness	15/32 " approx.	
Width	17 11/16 " approx.	
Length	47 7/32 " approx.	
Length and width deviation	Below 0.15%	$\leq 0.5\%*$
Side straightness deviation	Below 0.15%	$\leq 0.5\%*$
Squareness deviation	Below 0.15%	$\leq 0.6\%*$
Surface flatness deviation	Below 0.15%	$\leq 0.5\%*$

MECHANICAL FEATURES

Breaking strength	353,54 LBF	$>600\text{ N}*$
Abrasion resistance	No Aplica	
Crazing resistance	Resists 3 cycles	

HYGIENIC FEATURES

Chemical resistance	Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases	CLASE B Min. *
Stain resistance	Class 5. Easy cleaning with water	CLASE 3 Min. *

SCOPE OF USE

Technical code-1	Use on walls	
------------------	--------------	--

ANTI-SLIP VALUE

Friction (dry)	No Aplica	
Friction (wet)	No Aplica	

PACKING

Boxes	17,44 SQF/CS	
Pallets	627,74 SQF/PAL	
Units	5,81 SQF/ST	

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double glueing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.