

Model: LUSH WHITE POL.(S/R)MLL 154X328(12)(A)


Codes: 100201515 - C279007241

Absorption: Bla - Porcelain tiles ($E \leq 0.1\%$)

Thickness: 12 mm

Family: LUSH

Tone variations: V3

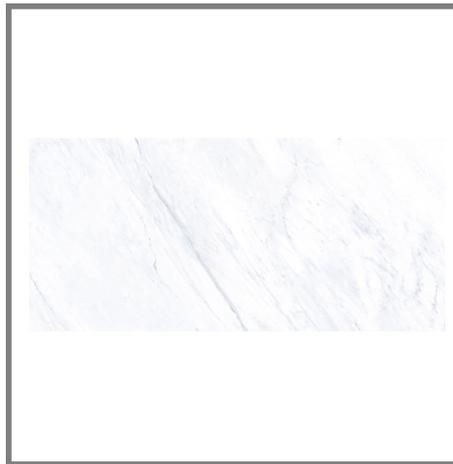

DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

Length	3280 MM	
Thickness	12 MM	
Width	1540 MM	
Length and width deviation	Below 0.15%	$\leq 0.5\%*$
Side straightness deviation	Below 0.15%	$\leq 0.5\%*$
Squareness deviation	Below 0.15%	$\leq 0.6\%*$
Surface flatness deviation	Below 0.15%	$\leq 0.5\%*$

*ISO-13006:2012 UNE-EN 14411:2012

MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-11

Breaking strenght	>3000 N	
Modulus of rupture	>45 N/MM2	
Abrasion resistance	<140	
Crazing resistance	Resists 3 cycles	

*ISO-13006:2012 UNE-EN 14411:2012

HYGIENIC FEATURES

UNE-EN ISO 10545-13-14:1995

Chemical resistance	MIN B	
Stain resistance	MIN 3	

*ISO-13006:2012 UNE-EN 14411:2012

ANTI-SLIP VALUE

UNE-ENV 12633:2003, DIN-51130 y ASTM C1028

Slip resistance (pendulum-wet)	CL0	
Stain resistance	MIN 3	
4s	DRY>36-LOW WET<25-HIGH	

*ISO-13006:2012 UNE-EN 14411:2012

SCOPE OF USE

Technical code-1	Use on walls	
Technical code-2	No additional requirements	

Certified company



A DCOF value of > 0.42 is the new standard for tiles specified for commercial level interior applications expected to be walked upon when wet, in standard A137.1-2012. It replaces the SCOF value of > 0.60 referenced in ADA Guidelines (measurement made as per the ASTM C1028 test method) However, there are many factors that affect the possibility of a slip occurring and then tiles with a DCOF of 0.42 or greater are not necessarily suitable for all projects. The specifier shall determine if tiles are appropriate for specific project conditions, considering by way of example, but not limited to; type of use, traffic, expected contaminants, expected maintenance, expected wear and manufacturer guidelines and recommendations. Tiles with a DCOF inferior to 0.42 shall only be installed when the surface will kept dry when walked upon and proper safety procedures are followed when cleaning the tiles.

A DCOF value of > 0.42 is the new standard for tiles specified for commercial level interior applications expected to be walked upon when wet, in standard A137.1-2012. It replaces the SCOF value of > 0.60 referenced in ADA Guidelines (measurement made as per the ASTM C1028 test method) However, there are many factors that affect the possibility of a slip occurring and then tiles with a DCOF of 0.42 or greater are not necessarily suitable for all projects. The specifier shall determine if tiles are appropriate for specific project conditions, considering by way of example, but not limited to; type of use, traffic, expected contaminants, expected maintenance, expected wear and manufacturer guidelines and recommendations. Tiles with a DCOF inferior to 0.42 shall only be installed when the surface will kept dry when walked upon and proper safety procedures are followed when cleaning the tiles.

PACKING

Boxes	1 ST/CS
Pallets	22 ST/PAL

ADDITIONAL NOTES

*CONTINUOUS PATTERN, MAXIMUM DEVIATION OF IMAGE, 3 cm

Certified company

